

TECHNICAL DATA SHEET

FORM No. DSG/FR/08

Doc Classification:
Restricted-4

Division:
Lighting

Department: Design
and Development

Document Number: TD 0909263


Revision: R00

Date: 13/11/2023

Page 1 of 3

Issue No. 1

Issue Date:02-05-2018

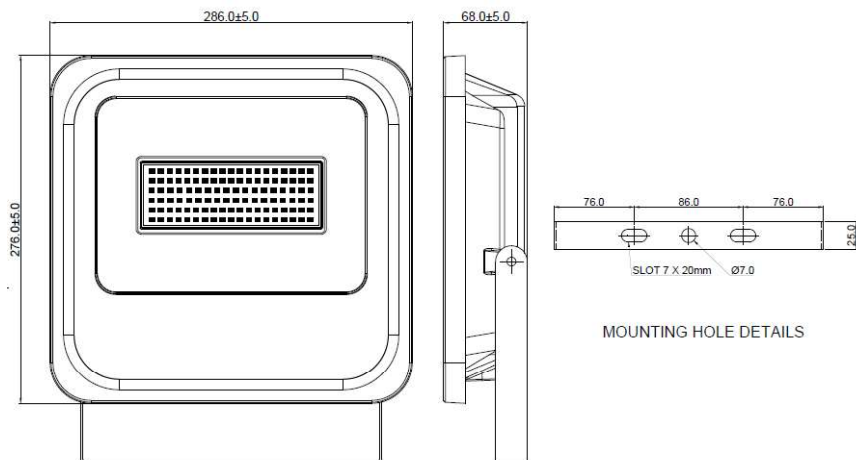

DIMENSIONS SHOWN ARE FOR INSTALLATION REFERENCES ONLY AND WILL HAVE TOLERANCE ±3mm UNLESS OTHERWISE SPECIFIED

GENERAL:

This floodlight luminaire comprises of die cast Aluminum housing powder coated and toughen glass. This luminaire is recommended for illuminating area lighting, monument lighting, retail shops etc.

PRODUCT DESCRIPTION	**NOMINAL WATTAGE (W)	CCT (K)	CRI	VOLTAGE (V)	**MAINS CURRENT (A)	*APPROX WT (KG)
LDFLX150CDL	150	6500	>70	230	0.758	2.35

*ONLY FOR STRUCTURAL/MOUNTING DESIGN CONSIDERATION

**RATED SYSTEM WATTAGE AND CURRENT WILL HAVE TOLERANCE AS PER IS 16104: 2012

TITLE:	TYPE: Flood Light	CUSTOMER REFERENCE:	STAMP: (Controlled Copy) Approved
PREPARED BY Ajay Sharma1	CHECKED BY Ramesh.unhavane	APPROVED BY Ramesh.unhavane	

Note: 1 AS EFFORTS ARE ON CONSTANTLY TO IMPROVE THE DESIGN AND METHODS OF MANUFACTURE OF THE PRODUCT, THE PRODUCT SUPPLIED MAY DIFFER IN DETAIL FROM THE DATA GIVEN HERE IN
2. THIS DRAWING & DESIGN IS THE PROPERTY OF CROMPTON GREAVES CONSUMER ELECTRICALS LTD. AND MUST NOT BE COPIED OR LENT WITHOUT THEIR PERMISSION IN WRITING
3.THE "APPROVED" INDICATED THAT IT IS A CONTROL COPY
4. DIMENSION SHOWN ARE FOR INSTALLATION REFERENCE ONLY AND IN MM WITH TOLERANCE OF +/-3mm UNLESS OTHERWISE SPECIFIED

 Crompton Greaves Consumer Electricals Ltd.	<h1>TECHNICAL DATA SHEET</h1>		FORM No. DSG/FR/08		
			Doc Classification: Restricted-4		
	Division: Lighting	Department: Design and Development	Document Number: TD 0909263		Page 2 of 3
			Revision: R00		Issue No. 1
		Date: 13/11/2023		Issue Date:02-05-2018	

MATERIAL SPECIFICATIONS:	
HOUSING	ALUMINIUM PRESSURE DIE CASTING, BLACK MET TEXTURE RAL 9005 (NEARBY)
FRAME	ALUMINIUM PRESSURE DIE CASTING, BLACK MET TEXTURE RAL 9005 (NEARBY)
GLASS	Toughened Glass
INTERNAL WIRE	PVC coated multistrand wire.
CABLE	3 core PVC coated multistrand cable.
CRADLE	BLACK MET TEXTURE RAL 9005 (NEARBY)

ELECTRICAL PARAMETERS:	
Rated Voltage (V)	220 ~ 240V
Frequency (Hz)	50
Operating Voltage Range (V)	140-270
Current (A) @ 240V	0.758mA
Wattage (W) @240V	150W
P.F.	≥0.9
I THD	<20%
Surge	4kV
High Voltage Sustain	440Vac @2hrs
Lumen	Rated: 15000-CDL

TITLE:	TYPE: Flood Light	CUSTOMER REFERENCE:	STAMP: (Controlled Copy) Approved
PREPARED BY Ajay Sharma1	CHECKED BY Ramesh.unhavane	APPROVED BY Ramesh.unhavane	

Note: 1 AS EFFORTS ARE ON CONSTANTLY TO IMPROVE THE DESIGN AND METHODS OF MANUFACTURE OF THE PRODUCT, THE PRODUCT SUPPLIED MAY DIFFER IN DETAIL FROM THE DATA GIVEN HERE IN

2. THIS DRAWING & DESIGN IS THE PROPERTY OF CROMPTON GREAVES CONSUMER ELECTRICALS LTD. AND MUST NOT BE COPIED OR LENT WITHOUT THEIR PERMISSION IN WRITING

3.THE “APPROVED” INDICATED THAT IT IS A CONTROL COPY

4. DIMENSION SHOWN ARE FOR INSTALLATION REFERENCE ONLY AND IN MM WITH TOLERANCE OF +/-3mm UNLESS OTHERWISE SPECIFIED

<div>Crompton</div> <div>Crompton Greaves Consumer Electricals Ltd.</div>	TECHNICAL DATA SHEET		FORM No. DSG/FR/08	
			Doc Classification: Restricted-4	
	Division: Lighting	Department: Design and Development	Document Number: TD 0909263	Page 3 of 3
			Revision: R00	Issue No. 1
		Date: 13/11/2023	Issue Date:02-05-2018	

INSTALLATION:	
Mounting System	Cradle provided for mounting
Mains	Provided 3 CORE, 1 SQMM wire
Protection	IP65

PRODUCT ORDERING CODE:	
Product Description	Ordering Code
LDFLX150CDL	LDFLX150CDL

SPARES ORDERING REFERENCE:				
Product Description				

TITLE:	TYPE: Flood Light	CUSTOMER REFERENCE:	STAMP: (Controlled Copy) Approved
PREPARED BY Ajay Sharma1	CHECKED BY Ramesh.unhavane	APPROVED BY Ramesh.unhavane	

Note: 1 AS EFFORTS ARE ON CONSTANTLY TO IMPROVE THE DESIGN AND METHODS OF MANUFACTURE OF THE PRODUCT, THE PRODUCT SUPPLIED MAY DIFFER IN DETAIL FROM THE DATA GIVEN HERE IN

2. THIS DRAWING & DESIGN IS THE PROPERTY OF CROMPTON GREAVES CONSUMER ELECTRICALS LTD. AND MUST NOT BE COPIED OR LENT WITHOUT THEIR PERMISSION IN WRITING

3.THE “APPROVED” INDICATED THAT IT IS A CONTROL COPY

4. DIMENSION SHOWN ARE FOR INSTALLATION REFERENCE ONLY AND IN MM WITH TOLERANCE OF +/-3mm UNLESS OTHERWISE SPECIFIED