

TECHNICAL DATA SHEET

FORM No. DSG/FR/08

Doc Classification:
Restricted-4

Division:
Lighting

Department: Design
and Development

Document Number:

TD0906183


Revision: 00

Date: 15/12/2021

Page 1 of 3

Issue No. 1

Issue Date:02-05-2018

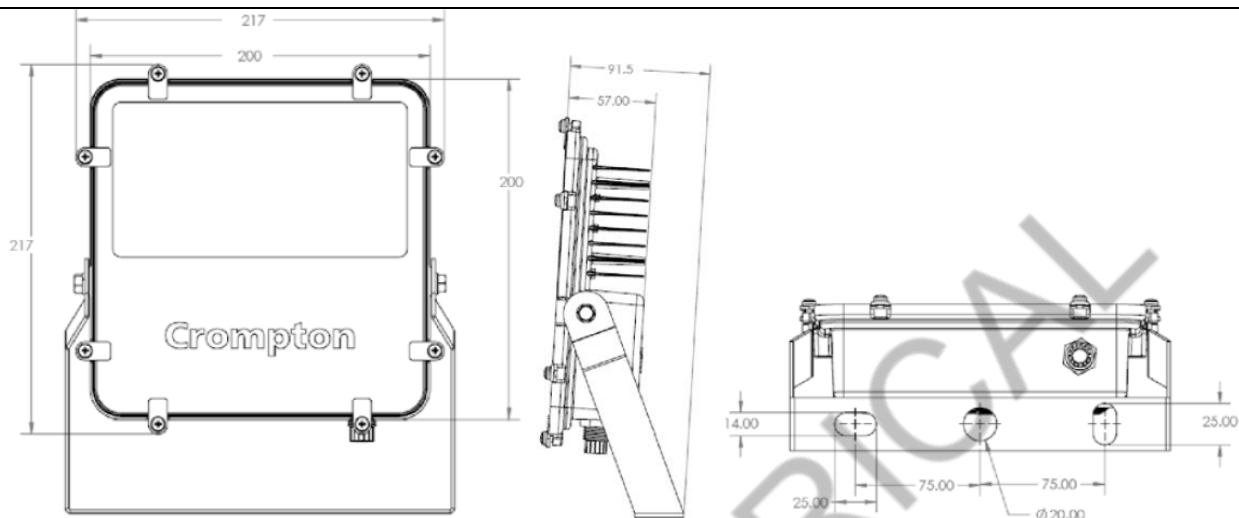

DIMENSIONS SHOWN ARE FOR INSTALLATION REFERENCES ONLY AND WILL HAVE TOLERANCE $\pm 3\text{mm}$ UNLESS OTHERWISE SPECIFIED

GENERAL:

This floodlight luminaire comprises of die cast Aluminium housing powder coated in black and toughened glass. This luminaire is recommended for illuminating Area lighting, Façade lighting, monument lighting, security lighting etc.

PRODUCT DESCRIPTION	**NOMINAL WATTAGE (W)	CCT (K)	CRI	VOLTAGE (V)	**MAINS CURRENT (A)	*APPROX WT (KG)
TFS-504-50-57-NL-SL-GL-NBK	50	5700 ANSI	70	240	0.220	1.82
Efficacy > 100 LPW						

*ONLY FOR STRUCTURAL/MOUNTING DESIGN CONSIDERATION

**RATED SYSTEM WATTAGE AND CURRENT WILL HAVE TOLERANCE AS PER IS 16104: 2012

TITLE: 50W LED Floodlight	TYPE: TFS-504	CUSTOMER REFERENCE:	STAMP:
PREPARED BY Naveen.kandariganesh.dhuri	CHECKED BY Ganesh.dhuri	APPROVED BY	

Note: 1 AS EFFORTS ARE ON CONSTANTLY TO IMPROVE THE DESIGN AND METHODS OF MANUFACTURE OF THE PRODUCT, THE PRODUCT SUPPLIED MAY DIFFER IN DETAIL FROM THE DATA GIVEN HERE IN

2. THIS DRAWING & DESIGN IS THE PROPERTY OF CROMPTON GREAVES CONSUMER ELECTRICALS LTD. AND MUST NOT BE COPIED OR LENT WITHOUT THEIR PERMISSION IN WRITING

3.THE "APPROVED" INDICATED THAT IT IS A CONTROL COPY

4. DIMENSION SHOWN ARE FOR INSTALLATION REFERENCE ONLY AND IN MM WITH TOLERANCE OF $\pm 3\text{mm}$ UNLESS OTHERWISE SPECIFIED

 Crompton Greaves Consumer Electricals Ltd.	TECHNICAL DATA SHEET		FORM No. DSG/FR/08	
			Doc Classification: Restricted-4	
	Division: Lighting	Department: Design and Development	Document Number: TD0906183TD0906183	Page 2 of 3
			Revision: 00	Issue No. 1
		Date: 15/12/202215/12/2021	Issue Date:02-05-2018	

MATERIAL SPECIFICATIONS:	
Housing	Aluminium die cast housing powder coated in Black
Glass	Heat resistant toughened glass
Internal Wiring	PVC coated multistrand wire
Cable	3 core PVC coated multistrand cable
Cradle	M.S. powder coated in Black
Glass Clip	SS 202

ELECTRICAL PARAMETERS:	
Rated Voltage (V)	240
Frequency (Hz)	50 ±3
Operating Voltage Range (V)	120-270~
Current (A) @ 240V	0.220
Wattage (W) @240V	50
P.F.	>=0.95
I THD	<10%

TITLE: 50W LED Floodlight	TYPE: TFS-504	CUSTOMER REFERENCE:	STAMP:
PREPARED BY Naveen.kandariganesh.dhuri		CHECKED BY Ganesh.dhuri	APPROVED BY
Note: 1 AS EFFORTS ARE ON CONSTANTLY TO IMPROVE THE DESIGN AND METHODS OF MANUFACTURE OF THE PRODUCT, THE PRODUCT SUPPLIED MAY DIFFER IN DETAIL FROM THE DATA GIVEN HERE IN 2. THIS DRAWING & DESIGN IS THE PROPERTY OF CROMPTON GREAVES CONSUMER ELECTRICALS LTD. AND MUST NOT BE COPIED OR LENT WITHOUT THEIR PERMISSION IN WRITING 3.THE "APPROVED" INDICATED THAT IT IS A CONTROL COPY 4. DIMENSION SHOWN ARE FOR INSTALLATION REFERENCE ONLY AND IN MM WITH TOLERANCE OF +/-3mm UNLESS OTHERWISE SPECIFIED			

 Crompton Greaves Consumer Electricals Ltd.	TECHNICAL DATA SHEET		FORM No. DSG/FR/08	
			Doc Classification: Restricted-4	
	Division: Lighting	Department: Design and Development	Document Number: TD0906183TD0906183	Page 3 of 3
			Revision: 00	Issue No. 1
		Date: 15/12/202215/12/2021	Issue Date:02-05-2018	

INSTALLATION:	
Cable Entry	Through Cable Gland
Mounting System	Cradle provided for mounting
Protection	IP66

PRODUCT ORDERING CODE:	
Product Description	Ordering Code
TFS-504-50-57-NL-SL-GL-NBK	TLF500160-E4

SPARES ORDERING REFERENCE:				
Product Description	Driver	Glass		
TFS-504-50-57-NL-SL-GL-NBK	45W/50W @700mA S0DVEXC4-45W-700 OR S0DVEXC4-50W-700	S0906042		

TITLE: 50W LED Floodlight	TYPE: TFS-504	CUSTOMER REFERENCE:	STAMP:
PREPARED BY Naveen.kandariganesh.dhuri	CHECKED BY Ganesh.dhuri	APPROVED BY	

Note: 1 AS EFFORTS ARE ON CONSTANTLY TO IMPROVE THE DESIGN AND METHODS OF MANUFACTURE OF THE PRODUCT, THE PRODUCT SUPPLIED MAY DIFFER IN DETAIL FROM THE DATA GIVEN HERE IN

2. THIS DRAWING & DESIGN IS THE PROPERTY OF CROMPTON GREAVES CONSUMER ELECTRICALS LTD. AND MUST NOT BE COPIED OR LENT WITHOUT THEIR PERMISSION IN WRITING

3.THE "APPROVED" INDICATED THAT IT IS A CONTROL COPY

4. DIMENSION SHOWN ARE FOR INSTALLATION REFERENCE ONLY AND IN MM WITH TOLERANCE OF +/-3mm UNLESS OTHERWISE SPECIFIED