


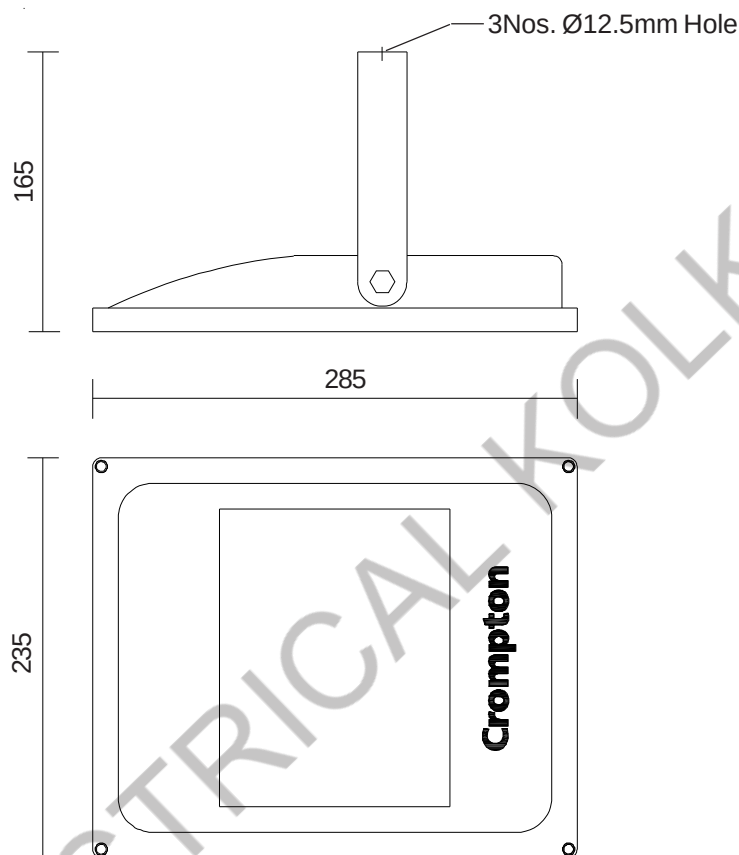

CUT OUT SIZE : 275 X 225

DIMENSIONS SHOWN ARE FOR INSTALLATION REFERENCES ONLY AND WILL BE VARYING ACCORDING TO THE MFG. PROCESSES.

GENERAL

This Integral LED under canopy recessed luminaire comprises of die cast aluminium housing, control gear compartment, frame with toughened glass.. This is recommended to be used in engineering industries where mounting height is 5 to 8 Mts.

CAT. REF.	SYSTEM** WATTAGE	VOLTAGE (V)	CCT	MAINS** CURRENT(A)	*APPROX. WT. (Kg)
LCNP-80-CDL	80W	240	5700 ANSI	0.330	3.00

* ONLY FOR STRUCTURAL/MOUNTING DESIGN CONSIDERATION.

** RATED SYSTEM WATTAGE AND CURRENT WILL HAVE TOLERANCE $\pm 8\%$

Title LED Undercanopy Luminaire	Type LCNP	CUSTOMER REFERENCE :
	AMD No. : ALL DIMENSIONS ARE IN MM	
AS EFFORTS ARE ON CONSTANTLY TO IMPROVE THE DESIGN AND METHODS OF MANUFACTURE OF THE PRODUCT, THE PRODUCT SUPPLIED MAY DIFFER IN DETAIL FROM THE DATA GIVEN HERE IN.	THIS DRAWING & DESIGN IS THE PROPERTY OF CROMPTON GREAVES LTD. AND MUST NOT BE COPIED OR LENT WITHOUT THEIR PERMISSION IN WRITING.	DRG NO. TD 0907096

MATERIAL SPECIFICATION

- | | |
|--------------------|--|
| 1. Housing | Die cast Aluminium powder coated in White. |
| 2. Frame | Die cast Aluminium powder coated in White. |
| 3. Internal Wiring | 19/30 multistrand teflon coated wire. |
| 4. Mains Terminal | 1 no 3 way 10 amps suitable for terminating max. 2.5 sq mm incoming cable. |
| 5. Earthing | Suitable for 14 SWG earthing wire. |
| 6. Surge Arrestor | 1 No. 5KV |

ELECTRICAL PARAMETERS

Rated Voltage (V)	:	240
Frequency (Hz)	:	50
Operating Voltage Range(V)	:	120 - 270~
Current (A) @ 240V	:	0.330
Wattage (W) @ 240V	:	80
PF	:	≥ 0.95

INSTALLATION

- | | |
|--------------------|--|
| 1. Cable Entry | Through PG11 Cable Gland |
| 2. Mounting System | Cradle having 3Nos. Ø12.5mm hole provided for suspension of luminaire. |
| 3. Maintenance | Cover with glass can be removed for accessories maintenance. |
| 4. Protection | IP 66. |

ORDERING CODE

LCNP-80-CDL

SPARE ORDERING REFERENCE

CAT. REF.	Driver	Surge Arrestor
LCNP-80-CDL	DRVP75W/700	SRPS-5K-320

AS EFFORTS ARE ON CONSTANTLY TO IMPROVE THE DESIGN AND METHODS OF MANUFACTURE OF THE PRODUCT, THE PRODUCT SUPPLIED MAY DIFFER IN DETAIL FROM THE DATA GIVEN HERE IN.

THIS DRAWING & DESIGN IS THE PROPERTY OF CROMPTON GREAVES LTD. AND MUST NOT BE COPIED OR LENT WITHOUT THEIR PERMISSION IN WRITING.

DRG NO.

TD 0907096