

Crompton

Lighting



Crompton Greaves Consumer Electricals Limited
05GBD, Godrej Business District, Pirojshanagar,
Vikhroli (West), Mumbai, Maharashtra - 400079, India
Customer Care No. : +91 9228880505 | www.crompton.co.in
Email: consumer.support@crompton.co.in

10W/18W BULKHEAD LIGHT

Rigel Neu

Engineered to Endure.



Designed for compactness. Engineered for strength.

Designed to deliver dependable performance in demanding environments, Rigel Neu combines a compact form with robust engineering to illuminate outdoor commercial and utility spaces with confidence.

From corridors and parking areas to building exteriors, it offers reliable, long-lasting illumination where durability and performance matter most.



Built for Outdoor Durability

A **durable polycarbonate housing** delivers long-lasting performance, making Rigel Neu a dependable lighting solution for commercial exteriors and utility spaces.

K

Designed for Every Environment

Available in **multiple CCTs – 3000K, 4000K, 6500K** options, Rigel Neu adapts seamlessly to diverse outdoor applications and lighting requirements.



Engineered for Energy Efficiency

With an efficacy of **≥100 LPW**, Rigel Neu delivers bright illumination while helping reduce energy consumption and operating costs.



Reliable Through Every Season

With **IP65-rated** protection against dust and water, Rigel Neu ensures dependable performance in outdoor commercial environments, rain or shine.

Application Areas



Commercial Buildings




Outdoor Walkways




Corridors



Staircases

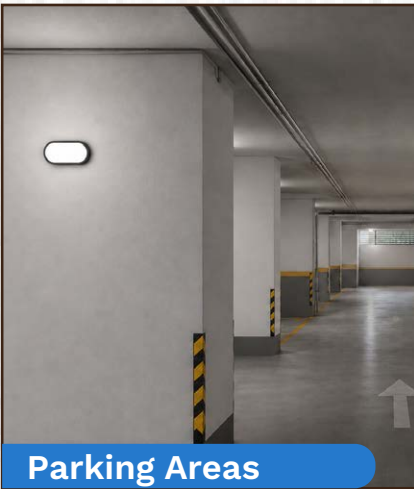

Parking Areas

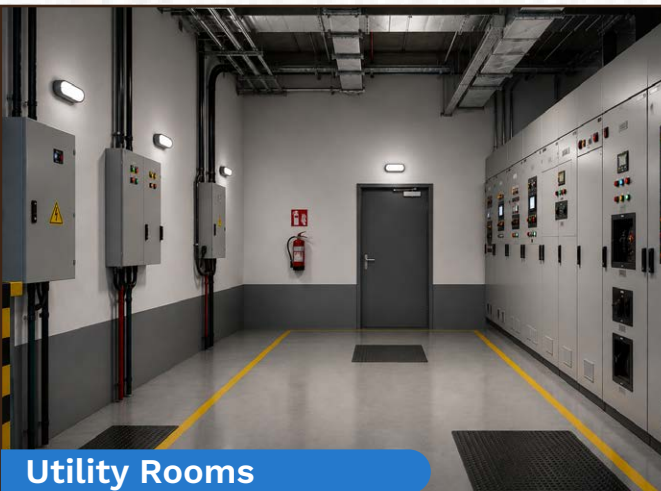

Utility Rooms



Building Perimeters

Technical Specifications

- 

Housing
Polycarbonate
grey housing
- 

Wattages
10W/18W
- 

Diffuser
Milky white
diffuser
- 

Efficacy
≥ 100Lm/W
- 

P.F.
> 0.90
- 

Protection
IP65
- 



THD
< 15%
- 

Surge
4KV inbuilt
driver
- 

CRI
80
- 

Mounting
Two mounting holes
of 4.25mm (10W)/
5.5mm (18W)
- 

CCT
3000K, 4000K,
6500K

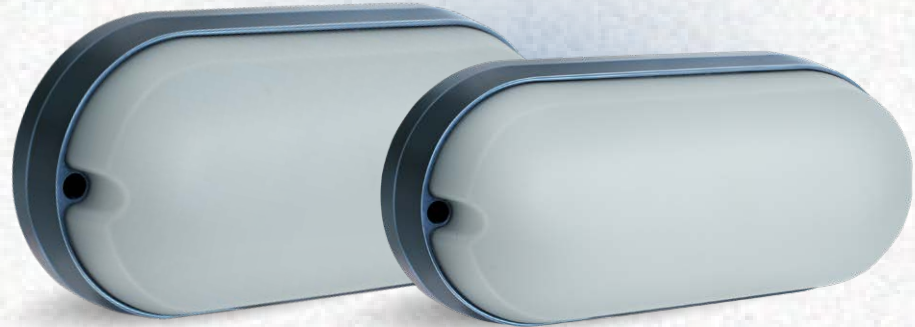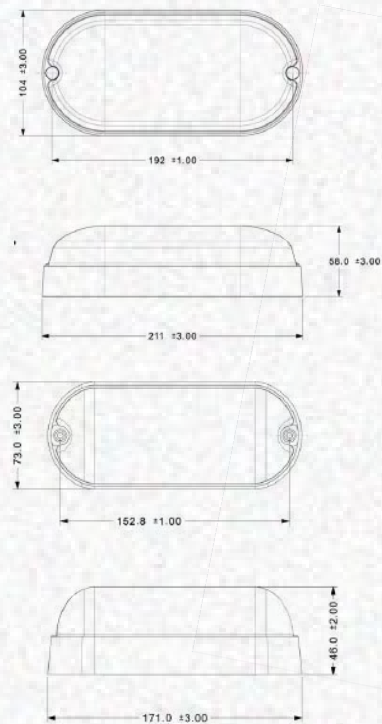

	Wattage (W)	CRI	Mains Current (A)	Approx. Wt. (Kg)	CCT(K)
TIS-309-10-65-SL-DP-NWH	10	80	0.050	0.160	6500K
TIS-309-10-30-SL-DP-NWH	10	80	0.050	0.160	3000K
TIS-309-10-40-SL-DP-NWH	10	80	0.050	0.160	4000K
TIS-309-18-65-SL-DP-NWH	18	80	0.090	0.270	6500K
TIS-309-18-30-SL-DP-NWH	18	80	0.090	0.270	3000K
TIS-309-18-40-SL-DP-NWH	18	80	0.090	0.270	4000K

