
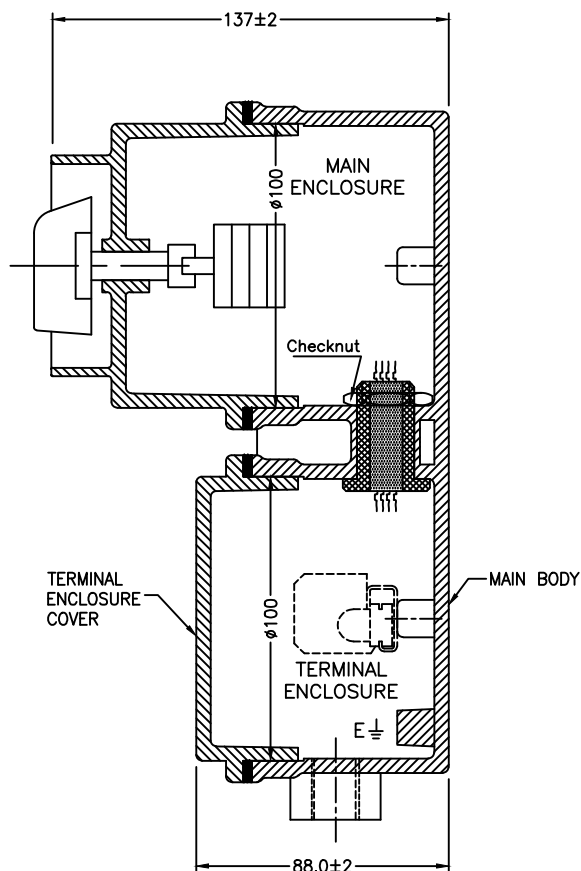


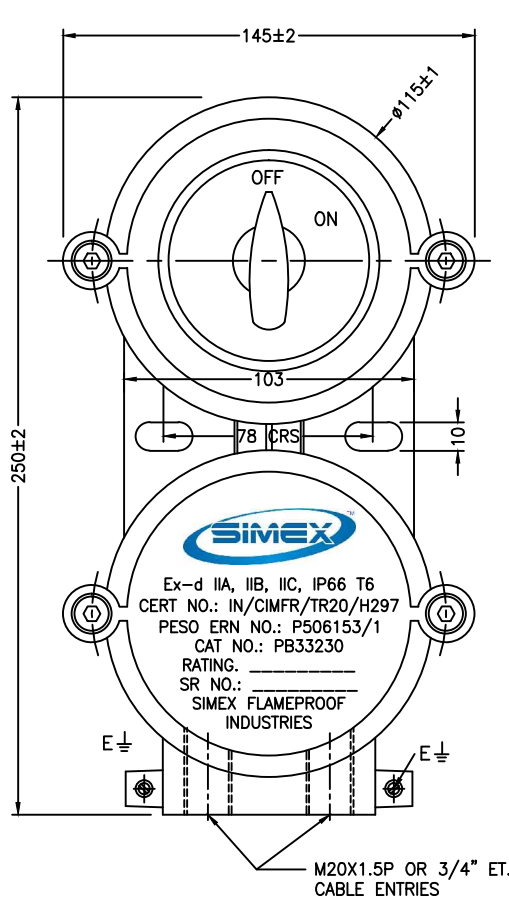

TYPE No. - PB33230
CIMFR TC NO.-IN/CIMFR/TR20/H297
CCOE No.(PESO) P506153/1

TECHNICAL DATA:

Ex'd' AS PER IS/IEC:60079-1:2014 SUITABLE FOR
INSTALLATION IN HAZARDOUS AREAS.

INGRESS PROTECTION

IP-66

AREA CLASSIFICATION:

GAS GROUPS IIA, IIB & IIC AREAS AS PER
IS/IEC:60079-1:2014

MATERIAL OF CONSTRUCTION:

ALUMINUM ALLOY LM6

RATING:

16, 25, 32 AMPS. 230 / 440 VOLT AC 50 / 60 HZ.

SURFACE TEMPERATURE CLASSIFICATION:

T6

EARTHING:

1 No. INTERNAL & 2 Nos. EXTERNAL

SURFACE FINISH:

POWDER COATING DARK GREY. (OTHER SHADE ON REQUEST)

CABLE ENTRY:

2 NOS. - M20X1.5P OR 3/4" ET.

HARDWARE:

EXTERNAL HARDWARE SHALL BE STAINLESS STEEL OR M.S.
PASSIVATED.

ACCESSORIES:

CABLE GLANDS, STOPPING PLUGS AVAILABLE ON REQUEST.

DISCLAIMER:

THE DESIGN/SPECIFICATION OF THIS DRAWING IS SOLE PROPERTY OF **SIMEX FLAMEPROOF INDUSTRIES** AND IT SHALL NOT TO BE COPIED, REPRODUCED, EXHIBITED, AND USED EXCEPT IN LIMITED WAY AS PERMITTED BY WRITTEN CONSENT. ANY DRAWING/SPECIFICATION AND COPIES MADE BY BORROWER SHALL BE RETURNED ON DEMAND.

SIMEX		SIMEX FLAMEPROOF INDUSTRIES	
MATERIAL AS PER B.O.M.		PLOT No. 39, DEV DEVASHYA INDUSTRIAL PARK, OPP PHOENIX FLEXIBLE PVT. LTD., KUBADTHAL, AHMEDABAD, GUJARAT - 382430	
TITLE:- FLP / WP (IP-66) ROTARY SWITCH	QUANTITY	-	
CAT. NO. - PB33230	PREPD. BY	A.S. Patel	17/06/2021
DRG. NO. SFI / FLP/ 03	SHEET 1 of 1	REVISION 1	APPD. BY A.S. Patel 17/06/2021